


END VIEW

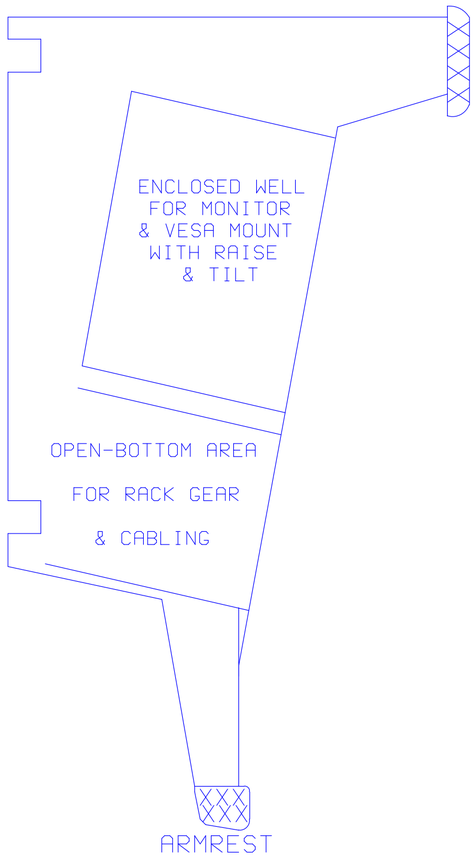

PLAN VIEW

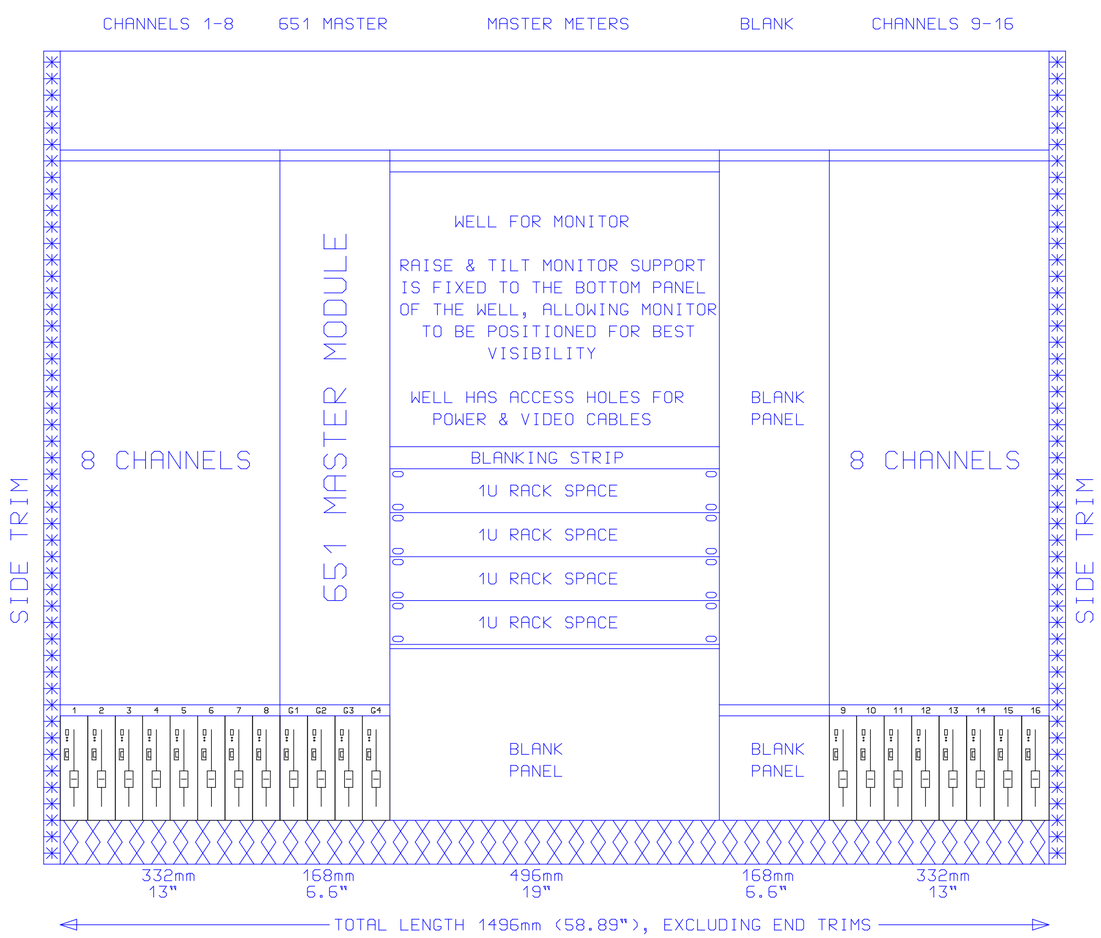

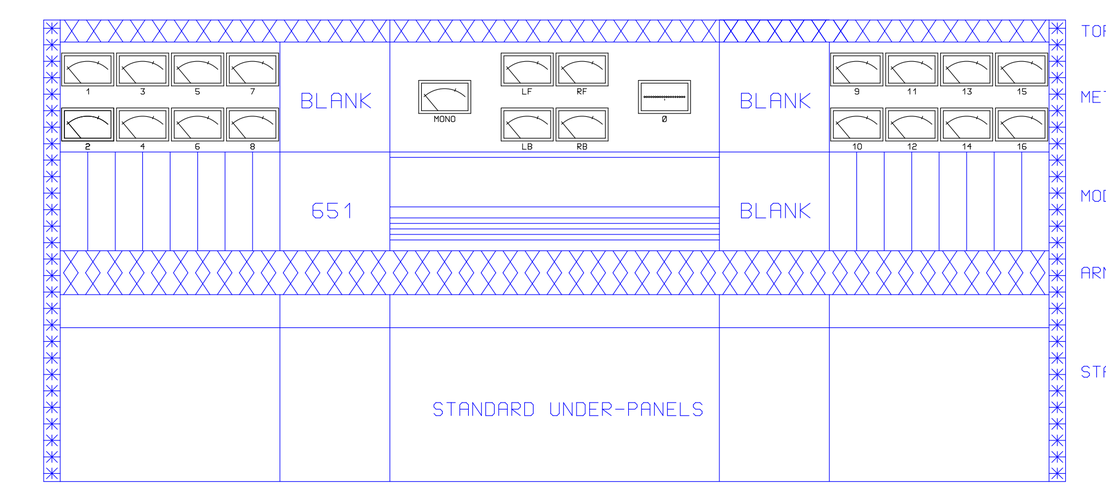

FRONT VIEW

KEY:

ELECTROLYTIC
POLYSTYRENE
POLYESTER
TANTALUM
CERAMIC
NON-POLARISED

GROUND / ØV SYMBOLS

ØV MAIN
ØVS SIDE CHAIN
ØVL LOGIC
ØVM METER POWER

-6 LEVEL REL. ØdBu
+6 LEVEL CHANGE
+/-10 CONTROL LIMITS
PHASE
ANTIPHASE
DC CONTROL
LOGIC TRANSITION
0.25W 1% MF
0.1W 1% SMD
0.25W FUSIBLE
POWER RESISTOR (0.75)

CML AUDIO SOLUTIONS,
UNIT 9A,
TOPLAND COUNTRY BUSINESS PK,
CRAGG ROAD,
MYTHOLMROYD, HEBDEN BRIDGE,
WEST YORKSHIRE,
HX7 5RW, ENGLAND.
TEL/FAX: 01422-885-196
E-MAIL:
DESIGN@CML-AUDIO.CO.UK
WEB:
WWW.CMLAUDIO.COM

CML AUDIO SOLUTIONS OWNS COPYRIGHT OF THIS DRAWING, WHICH MAY NOT BE COPIED, REPRODUCED OR DISCLOSED, BY ANY MEANS WHATSOEVER, IN PART OR IN WHOLE, TO A THIRD PARTY WITHOUT WRITTEN PERMISSION

PROJECT:
AES PRO AUDIO
SSL 4016
MAT MAINHARD

TITLE:
SSL 4016 LAYOUT
WIDE CENTRE

DRAWING NO.
SL4016-012

ISSUE	DATE	SIZE
1	10-01-19	A2

SHEET 1 OF 1 SHEETS

DRAWN BY	CHECKED	APPROVED
GJC		